




HOSHIZAKI

FM-80KE FLAKE ICE MAKER / FM-80KE-N NUGGET ICE MAKER

FM-80KE / FM-80KE-N

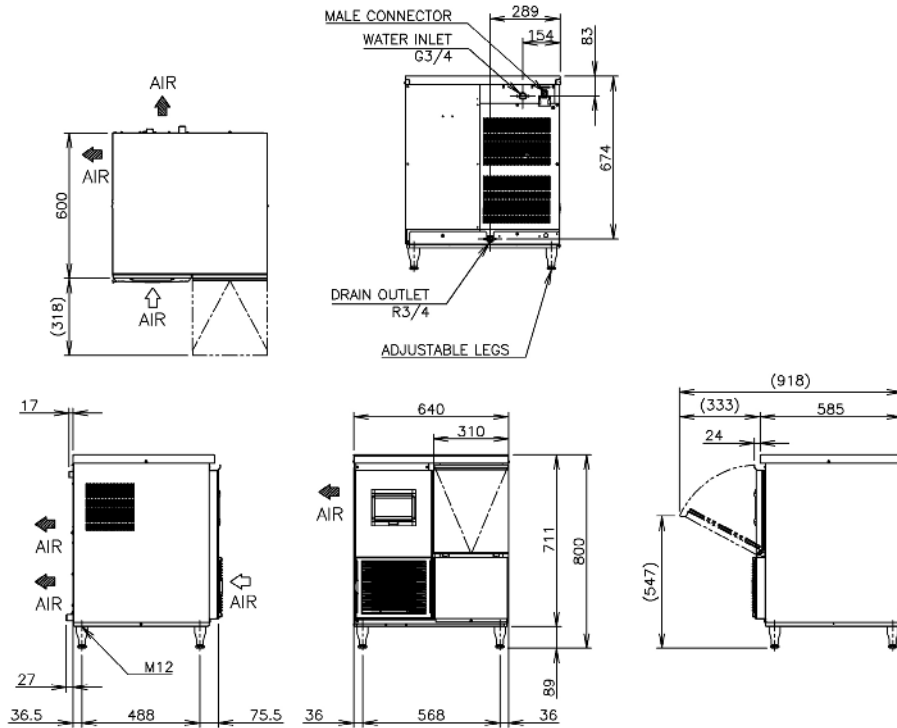

DO9513 / 2011.08.04

Specification	FM-80KE / FM-80KE-N
Power Supply	1 Phase 220-240V 50Hz Capacity: 0.52kVA (2.0A)
Amperage (AT.32 °C, WT.21 °C)	1.8A Starting: 5.4A
Electric Consumption	300W (Power Factor: 67%)
Exterior	Stainless Steel, Galvanized Steel (Rear)
Insulation Foam / Blowing Agent	HFC-245fa, 365mfc
Connections - Water Supply	Direct Connection to Water Main, Inlet: 3/4" (Rear)
Connections - Drain	Outlet: 3/4" (Rear)
Ice Making System	Thin ice forming inside Cylinder (Flake Ice)
Compressor	Hermetic
Condenser	Fin and Tube type, Air-cooled
Heat Rejection (AT.32 °C, WT.21 °C)	470W
Evaporator	Tube coiled around Cylinder (Solder Plated)
Refrigerant	R134a 220 g
Ice Making Water Control	Float Switch and Solenoid Valve
Electrical Circuit Protection	6A Circuit Breaker
Refrigerant Circuit Protector	Compressor Internal Thermostat, Condensing Temperature detected by Thermistor (Auto-reset)
Mechanism Protection	Micro switch (Manual-reset)
Interlock	Shutdown by Microprocessor (Manual-reset)
Dimensions Product excl. Packaging	640 x 600 x 798-833 (W x D x H, mm)
Dimensions Product incl. Packaging	750 x 700 x 890 (W x D x H, mm)
Weight Gross / Net	75 kg / 65 kg

Operation Conditions	
Ambient Temperature	5 - 40°C
Water Supply Temperature	5 - 35°C
Water Supply Pressure	0,05-0,8MPa
Voltage Range	Rated Voltage ± 10%

Accessories
Scoop
Installation Kit

For more information please contact your local sales office:

Hoshizaki Belgium:
Hoshizaki Deutschland:
Hoshizaki France:
Hoshizaki Iberia:
Hoshizaki Middle East:

info@hoshizaki.be
info@hoshizaki.de
info@hoshizaki.fr
info@hoshizaki.es
sales@hoshizaki.ae

Hoshizaki Nederland:
Hoshizaki United Kingdom:
Other countries:

sales@hoshizaki.nl
uksales@hoshizaki.co.uk
sales@hoshizaki.in

www.hoshizaki-europe.com