

NU 300

EASY

Scotsman
Ice Systems

Self Contained Ice Machine up to 142 kg

Item #:
Project:
Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.



NU 300
Dice 10 g
W 22 x D 22 x H 22 mm



NU H 300
Half Dice 6 g
W 10 x D 22 x H 28 mm



NU L 300
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Water cooled

INTERNAL BIN CAPACITY

37 kg

REFRIGERANT GAS

R404A

OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

VOLTAGE V/Hz/ph

230/50/1

Certifications:



IMPORTANT NOTICE:
Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free App Scotsman Ice
Apple store
Google play
Windows store



www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine up to 142 kg


NU 300



Self Contained Ice Machine up to 142 kg

Item #:
Project:
Quantity:

Self Contained Ice Machine up to 142 kg

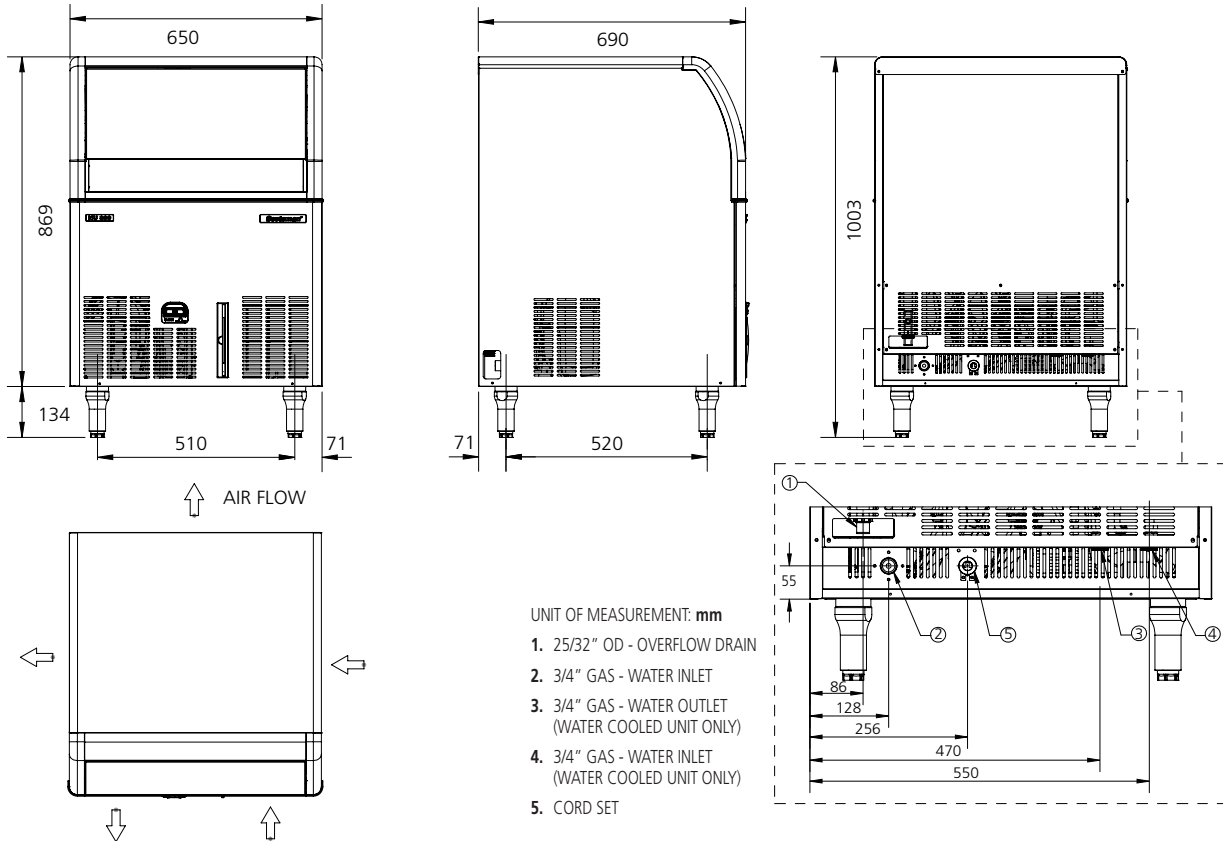

UNIT DATA	
Size (W x D x H)	650 x 690 x 1003 mm
Net weight	65 kg
SHIPPING DATA	
Carton (W x D x H)	730 x 770 x 1050 mm
Weight	70 kg

Version	Voltage	Compressor		Circuit wires		Max. fuse size
		Btu/h	W	No.	Ømm ²	A
NU 300 AS	230/50/1	6029	1767	3	1.5	16
NU H 300 AS	230/50/1	6029	1767	3	1.5	16
NU L 300 AS	230/50/1	6029	1767	3	1.5	16
NU 300 WS	230/50/1	6029	1767	3	1.5	16
NU H 300 WS	230/50/1	6029	1767	3	1.5	16
NU L 300 WS	230/50/1	6029	1767	3	1.5	16

Version	Condensation	Voltage	24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
			10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NU 300 AS	Air	230/50/1	142	135	100	17.6	17.6	6.2	950
NU H 300 AS	Air	230/50/1	128	121	92	17.6	16.2	5.7	950
NU L 300 AS	Air	230/50/1	142	130	93	17.6	16.4	5.8	950
NU 300 WS	Water	230/50/1	135	130	115	12.1	13.9	89.8	950
NU H 300 WS	Water	230/50/1	130	130	115	12.1	13.9	89.8	950
NU L 300 WS	Water	230/50/1	142	130	100	12.1	12.1	78.1	950

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions